


Signatone TRX Probe Holder

Very low-Noise probe holder (= $^{\sim}$ ± 2 fA) when used with the triaxial chuck and in an electrically shielded environment. Designed for use with all Signatone Micropositioners and a variety of probe tips

The Signatone Triaxial Shielded probe tip holder includes a 60" Triax cable terminating in a Triax connector. Includes Screw-Lock probe tip mounting mechanism

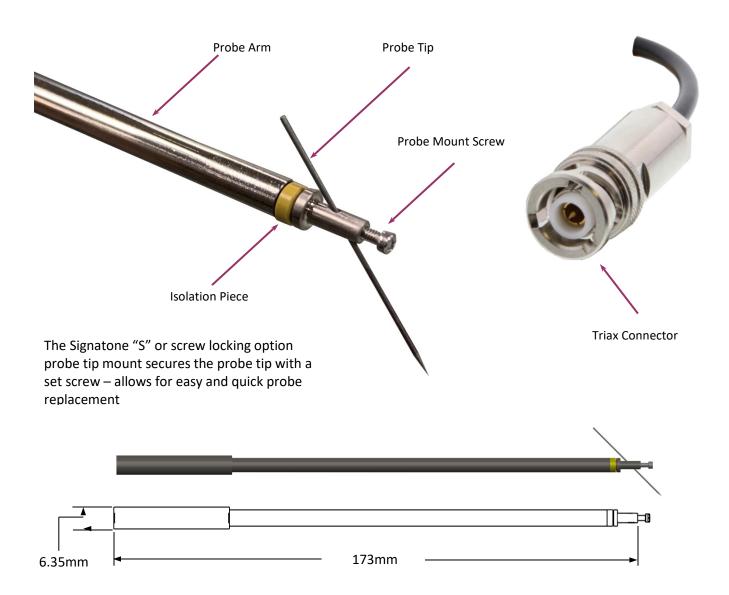

Ultra-Low Current and Full Range Thermal Probing

PART #	Material	Length	Probe Mount	Connection	Typical Use
TRX-L-S-60-#	Brass	173mm	Screw- Lock	Triax	<u>+</u> 2fA



WARRANTY

- Standard Warranty 12 months *
- For Extended Warranty and Service Contracts: Contact Signatone Corp. for more information
- * See Signatone Corporate Terms and Conditions of Sale for further details.

North America: Sales.NA@signatone.com
Europe: Sales.Europe@signatone.com

■ Asia: <u>Sales.Asia@signatone.com</u>