
# Signatone Multi Purpose Probe Tips

## Model SE-T

- Material-Tungsten
- Point /Tip Diameter = 5μ
- Length = 31.75mm / 1.25"
- Shank Diameter = 0.63mm
- Fabrication Precision Ground
- Typical Use 5μ to 100μ Pad Metal
- Typical Test General




Model SE-T (Ground Tip)

# A Tip for Every Test

#### Offering a wide variety of passive probe tips to suit virtually every probing requirement.

The most common style probe tip (referred to as "Hard-TIP") includes a taper or angle from the probe shaft to the tip. This effect is achieved by etching or a grinding process on the material allowing more mass at the tip end. (recommended for probing through passivation or hard materials)

The SE-T is a general-purpose probe tip made with a 31.75mm /1.25" long, 0.63mm diameter tungsten wire that has been precision ground down to  $5\mu$  (micron). The shank may be bent into a variety of shapes to meet the most complex probing configurations. This is our widely used "precision ground tip" and is typically used for general probing. Typical:  $5\mu$  to  $100\mu$  lines and pads

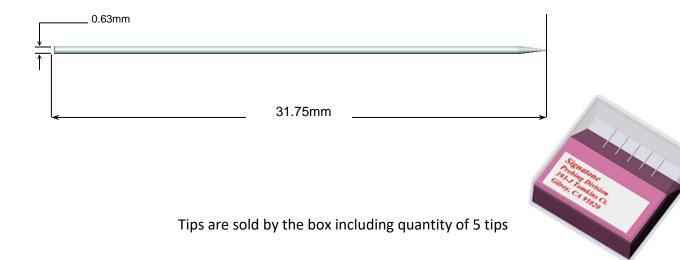



### WARRANTY

- Standard Warranty 12 months \*
- Note: Probe Tips, Probe Tip Holders, and 4-Point Probe Heads are considered consumable items and are not covered under the standard warranty
- \* See Signatone Corporate Terms and Conditions of Sale for further details.

North America: <u>Sales.NA@signatone.com</u>
Europe: <u>Sales.Europe@signatone.com</u>

Asia: Sales.Asia@signatone.com

